











EX50 AC



FEATURES

- · COMPACT AND STURDY DESIGN
- FLANGED COMPONENTS
- ANTI-NOISE FILTER
- THERMAL PROTECTION
- SUCTION UNIT WITH INTEGRATED FILTER (DRUM VERSION)
- · UL VERSION AVAILABLE

The PIUSI EX50 AC is a compact and sturdy pump that satisfies the strictest ATEX/IECEx requirements concerning the usage of this equipment in potentially explo-sive atmospheres. It is equipped with built-in bypass valve, non-return valve and anti-noise filter.


PERFORMANCE

UP TO **50 L/MIN** FLOW RATE

AC VOLTAGE POWER

30 MIN (30MIN OFF) DUTY CICLE



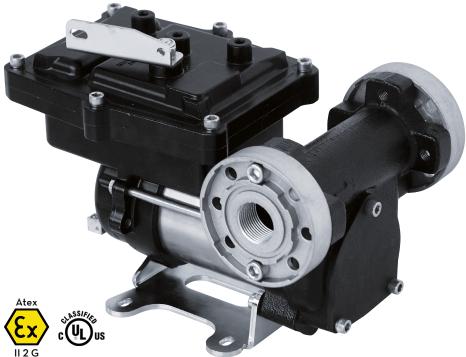

EX50 PUMP





OUR PUMPS COMPLIES WITH THE F	OLLOW	ING MA	RKING A	TEX/IECEX	
	EX5O	FX75	EX5O	FX75	

				ENJO	EA/J	ENJU	EA/J		
II	2	G	Ex	d	db	IIA	IIB	T4	Gb
GROUP	CATEGORY	TYPE OF EXPLOSIVE	PERMANENT PREFIX	PROTE MET	CTION HOD	G. GL	AS ASS	TEMPERATURE CLASS	EQUIPMENT PROTECTION

PACKAGING									
	WE	IGHT	PAC	KAGING	N. BOXES / EUROPALLET				
CODE	KG	LBS	ММ	INCH	PCS/BOX	×	-		
F0037300A	6,9	15,2	345X175X225	-	1	60	84		













TANK MONITORING

HOSE REEL

ACCESSORIES

MERCHANDISE




























CHART

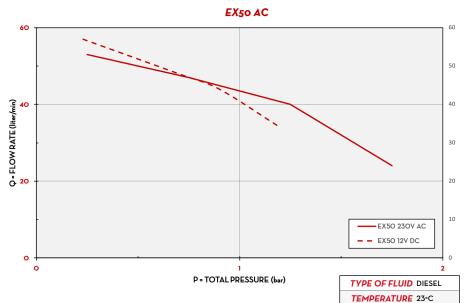

IN THE BOX

- EX50 AC PUMP
- FLANGED CONNECTIONS
- · INSTRUCTION MANUAL


DETAILS





DIMENSIONS

223 145



MATERIALS

- · BODY: CAST IRON
- ROTOR: SINTERED STEEL

> SUCTION HOSE Ø 1" MIN. MAX SUCTION HEIGHT:

- 2M (7FT) W/O NON RETURN VALVE - 4M (14FT) W NON RETURN VALVE

- · VANES: PPS
- SEAL: VITON
- · SHAFT: STEEL





PUMP



TANK

Dimensions expressed in millimeters

TECHNICAL DATA										
CODE	DESCRIPTION	FLUIDS TYPE	FLOW RATE		VOLTAGE			DUTY CICLE		OUTLET
			L/MIN	GPM	AC VOLT/HZ	POWER WATT	AMP. MAX.	MINUTES	RPM	BSP
F0037300A	EX50 230V AC ATEX	000	50	13	230/50-60	250	1,2	30	2700	1"

() UPON REQUEST IT IS AVAILABLE WITH DIFFERENT VOLTAGES AND 60 HZ FREQUENCY. THE PUMP CAN BE USED ONLY WITH THE FOLLOWING FLUIDS: DIESEL, KEROSENE, PETROL, PETROL ALCOHOL MIXED MAX 15%, AVGAS 100/100LL, JET $\Delta/\Delta 1$ - ASPEN 2/4

EX50 AC