



CAR FILLING



FUEL MANAGEMENT SYSTEMS



KITS



PUMPS



METERS



METERED NOZZLES

TURBINOX


FEATURES

- LONG LASTING
- INDUSTRIAL APPLICATION
- STAINLESS STEEL BODY
- VERSATILE

The PIUSI TURBINOX is a turbine pulse meter suitable for transferring AdBlue®. Its stainless steel body guarantees a long-lasting resistance and makes this meter perfect for plant installations.

PERFORMANCE

UP TO 40 L/MIN	20 BAR MAX
FLOW RATE	OPERATING PRESSURE
±1%	0,4%
ACCURACY	REPEATABILITY

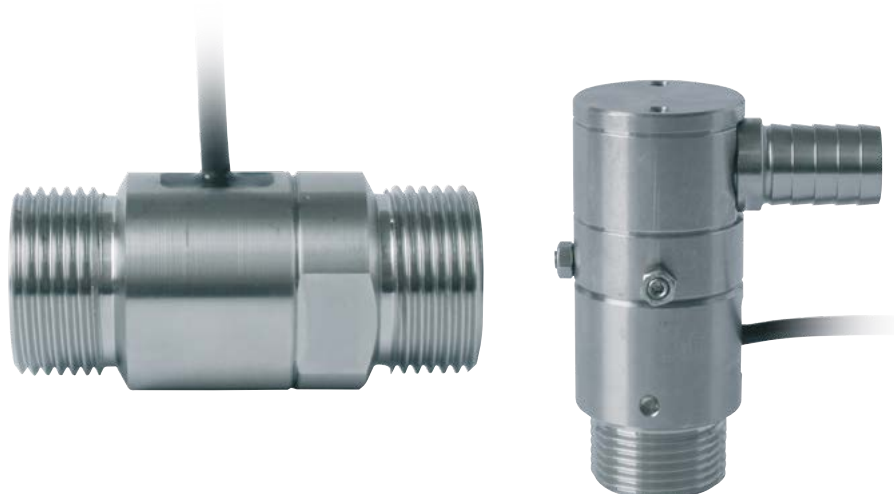

TURBINOX - TURBINOX 90°



PACKAGING

CODE	WEIGHT		PACKAGING		
	KG	LBS	MM	INCH	PCS/BOX
FOO420000A	0,5	1,1	80X80X75	3,1X3,1X3	1
FOO420001A	0,5	1,1	80X80X75	3,1X3,1X3	1
FOO410000	1,2	2,6	225X125X150	8,9X4,9X5,9	1



NOZZLES



FILTRATION



TANK MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE



AIR



ANTIFREEZE



AdBlue®



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL




WATER



WINDSCREEN

CHART

TURBINOX

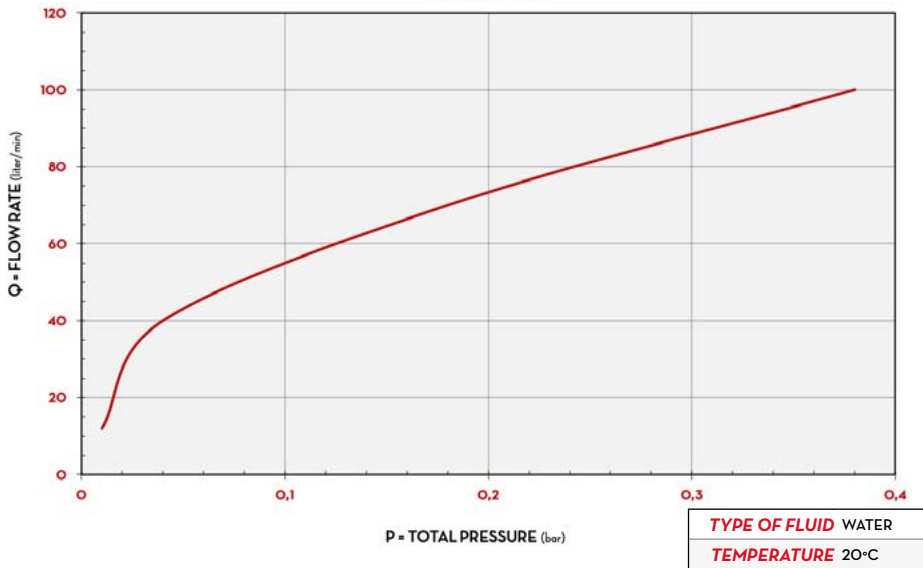

IN THE BOX


- TURBINOX METER
- INSTRUCTION MANUAL

DETAILS



TURBINE

DIMENSIONS

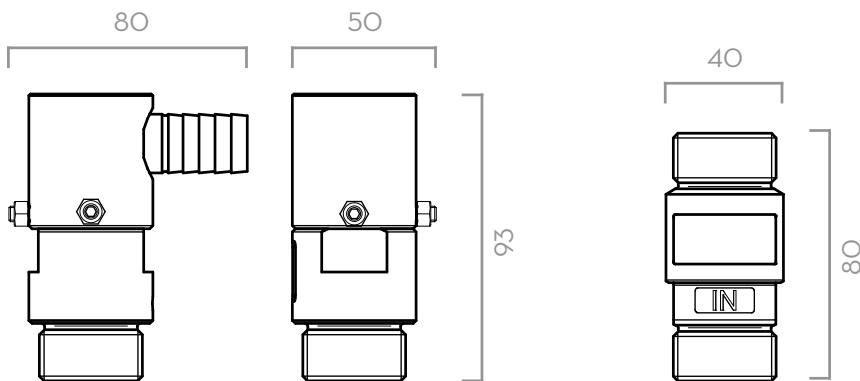

Dimensions expressed in millimeters

MATERIALS

- BODY: STAINLESS STEEL
- TURBINE: TECHNOPYLIMER

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW RATE		PRESSURE		DISPLAY	PULSE OUT (P/L)	
			L/MIN	GPM	BAR	PSI		PULSE VERSION	DISPLAY VERSION
FOO42000A	TURBINOX INLINE PULSE METER		10 - 40	2,6-10,6	20	290	NO	90	-
FOO42001A	TURBINOX 90° TURBINE PULSE METER		10 - 40	2,6-10,6	20	290	NO	90	-
FOO410000	TURBINOX 90° TURBINE PULSE METER W/DISPLAY UREA		10 - 40	2,6-10,6	20	290	YES	90	1 - 100

TURBINOX